


wedi *Moltoromo* | Modular shower screen system

- For individual planning
- Waterproof
- For private and public applications

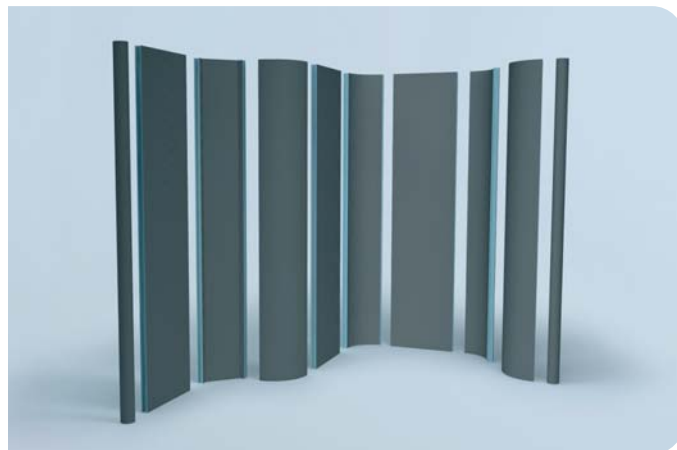

General product description

Moltoromo is a modular wall system for quick and simple shower or room partitioning.

Applications

Shower and room partitioning for wet and dry areas that are covered with tiles, slabs or natural stone on at least one side.

Product properties

- Waterproof
- Heat insulating
- Lightweight and stable

Surface requirements

Joints between walls, floor and ceiling must be solid, load-bearing, non-deformable, dry and free of dirt and other contaminants.

Processing

The wall segments are tongue and groove and are secured with wedi 610 adhesive and sealant. The fixing set must be used for connection to the wall and door. The precise installation must be executed in accordance with the Moltoromo installation instructions available from www.wedi.de.

Before tiling, transitions between panels are covered with wedi Tools reinforcing tape (part of the installation set). The supply segments are used if fittings, pipes or other built-in elements are to be installed or secured.

Note for subsequent work

Tiles, slabs or natural stone coverings and mineral plasters can be applied to the wall segments 24 hours after installation.

Technical properties – Rigid foam

Extruded polystyrene rigid foam core	XPS
Long-term compressive strength (50 years) \leq 2% compression DIN EN 1606	0.08 N/mm ²
Compressive resistance at 10% compression EN 826	0.25 N/mm ²
Thermal conductivity EN 13164	0.036 W/mK
Bulk density EN 1602	32 kg/m ³
Temperature limits	-50°C / +75°C
Fire behaviour DIN 4102	B1
Fire behaviour EN 13501	E

Moltoromo technical values

Element height	2600 mm
----------------	---------

Packing

- All wall segments, supply elements and central finishing element are supplied in the box as well as the connecting spring.
- The installation set for the two segments is supplied in the box.
- The wall/door fixing set is supplied in a transport sleeve.

Storage

The elements must be stored in a dry place and protected from heat. The wedi 610 adhesive and sealant in the installation set must be stored in a cool, dry place between +5°C and +25°C. The product can be stored for 9 months in its unopened original packaging.

Safety notice

none